

GOBO PROJECTORS


nelux
Producing your dreams

Suitable for indoor, subway, gym, stairs, offices, supermarkets, factory workshops, workshops, entertainment venues, showrooms, shops, hotels, bars, cafes, shopping centers and other occasions.



BE SEEN, BE SAFETY






50W / NG11050

Projection Distance: 1m-10m (dark environment)	Lamp Specification: 30/18mm
Light Source Type: Osram chip	Beam Angle: 20 degrees
Light Source Power: 50W LED	Shell Material: Aluminum alloy
Light Source Life: 50000H	Rated Voltage: DC 10-80V
Luminous Flux: 3750LM	Overall Power: 50W
Color Temperature: 7000K	Degree Of Protection: IP67







30W/NG11030



150W/NG11150



NG11300




	NG11030	NG11150	NG11300
Projection Distance:	1m-10m (dark environment)	3m-25m (dark environment)	6m-50m (dark environment)
Light Source Type:	Osram chip	Osram chip	Osram chip
Light Source Power:	30W LED	150W LED	300W LED
Light Source Life:	50000H	50000H	50000H
Luminous Flux:	2250LM	12000LM	24000LM
Color Temperature:	7000K	7000K	7000K
Lamp Specification:	30/18mm	37/18mm	37/18mm
Beam Angle:	20 degrees	20 degrees	20 degrees
Shell Material:	Aluminum alloy	Aluminum alloy	Aluminum alloy
Rated Voltage:	DC 10-80V	DC 10-80V	DC 10-80V
Overall Power:	30W	150W	300W
Degree Of Protection:	IP67	IP67	IP67
Power Supply Type:	Meanwell power supply		



30W/NG10930
50W/NG10950



80W/NG10980
100W/NG19100
150W/NG19150

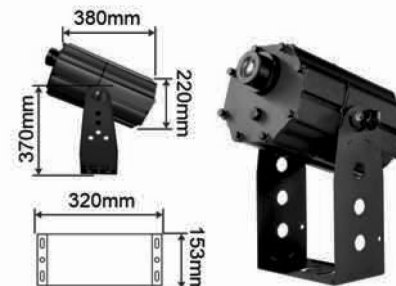

240W/NG19240
300W/NG19300
400W/NG19400
600W/NG19600

	NG10930	NG10950	NG10980	NG19100	NG19150	NG19240	NG19300	NG19400	NG19600
Projection Distance:	1m-6m	1m-10m	3m-15m	3m-20m	3m-25m	6m-40m	6m-50m	10m-100m	10m-150m
Light Source Type:	Osram chip	Osram chip	Osram chip	Osram chip	Osram chip	Osram chip	Osram chip	Osram chip	Osram chip
Light Source Power:	35W LED	50W LED	80W LED	100W LED	150W LED	240W LED	300W LED	400W LED	600W LED
Light Source Life:	50000H	50000H	50000H	50000H	50000H	50000H	50000H	50000H	50000H
Luminous Flux:	3200LM	4800LM	8500LM	8500LM	12000LM	18000LM	24000LM	36000LM	42000LM
Color Temperature:	7000K	7000K	8000K	8000K	8000K	8000K	8000K	8000K	8000K
Lamp Specification:	38/22mm	38/22mm	38/22mm	38/22mm	38/22mm	38/30mm	38/30mm	53/45mm	55/40mm
Beam Angle:	20 degrees	20 degrees	20 degrees	10-20 degrees	10-20 degrees	10-20 degrees	10-20 degrees	10-20 degrees	10-50 degrees
Shell Material:	Aluminum alloy	Aluminum alloy	Aluminum alloy	Aluminum alloy	Aluminum alloy	Aluminum alloy	Aluminum alloy	Aluminum alloy	Aluminum alloy
Rated Voltage:	AC85V-260V	AC85V-260V	AC85V-260V	AC85V-260V	AC85V-260V	AC85V-260V	AC85V-260V	AC85V-260V	AC85V-260V
Overall Power:	30W	50W	80W	100W	150W	240W	300W	400W	600W
Degree Of Protection:	IP65	IP65	IP65	IP65	IP65	IP65	IP65	IP65	IP65
Power Supply Type:	Customized power supply				Meanwell power supply				